



uni-mesh™

FIRE RETARDANT



Uni-span's Uni-mesh™ and more recent Uni-grid™ has been safely containing scaffolding in the most aesthetically pleasing method for over a decade. This compliant and trusted system has become a market leader in the construction sector.

Our innovative ways never stagnate. Due to recent safety alerts and preempting that WHS Regulations and Australian Standards will be updated to accommodate a fire retardant containment system for scaffolding;

Uni-span introduces... **uni-mesh™**
FIRE RETARDANT 

Uni-mesh™ Fire Retardant, also known as Uni-mesh™ FR, holds the same features and benefits as Uni-span's standard Uni-mesh™ product. The only difference is a fire retardant additive to the manufacturing process that allows this product to comply with the ABCB Flammability Index, in accordance with AS 1530.2-1993 (Methods for fire tests on building materials, components and structures; Part 2: Test for flammability of materials).

Increasing quality control measures has allowed Uni-span to offer a **3 year manufacturer's warranty** on all of our containment products. We guarantee Uni-mesh™, Uni-grid™ and Uni-mesh™ FR rolls will stay fit for purpose for a 3 year period.

DESCRIPTION

DESCRIPTION
Versatile product for use in all sectors
Steel wire reinforced
Fire retardant - Flammability Index 1
Tested & certified to all relevant Australian standards & WHS regulations
Easy & economical installation & removal
Can be attached to scaffolding with cable ties/KwikAz clips

SIZE & WEIGHT

SIZE	WEIGHT PER ROLL
0.95m x 10m	7.95 kg
1.9m x 10m	15.9 kg



FEATURES & BENEFITS

FEATURES	BENEFITS
Identifiable by red strip within the mesh	Durable for multiple uses
50mm x 50mm grid with shade element	Ready to install & rolls up after use
Prescribed lining is steel wire reinforced	Repairable and aesthetically pleasing
Remains unimpaired in wind speeds up to 100kph	Saves time, money & labour
	Full test results available on request
	Available in blue, black, beige & red (min. order QTY applies)




RATING DEFINITIONS

Flammability is the ability of a substance to burn or ignite, causing fire or combustion. The degree of difficulty required to cause the combustion of a substance is quantified through fire testing. Internationally, a variety of test protocols exist to quantify flammability.

Flame spread or surface burning characteristics rating is a ranking derived by laboratory standard test methodology of a material's propensity to burn rapidly and spread flames.

Heat factor is the amount of heat generated when the product burns.

UNI-MESH™ FR RATINGS

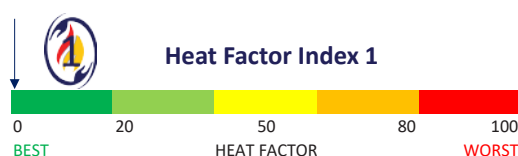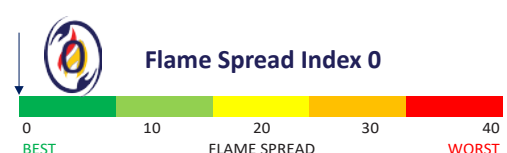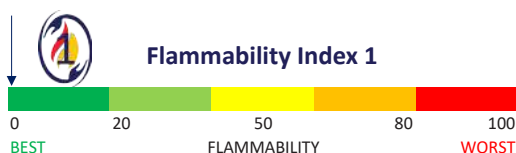

TEST REPORTS & VERIFICATION

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
 A.B.N 43 006 014 106
 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
 P.O Box 240, North Melbourne, Victoria 3051
 Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

Client : Uni-Span Australia Pty Ltd
 28 Computer Road
 Yatala QLD 4207

Test Number : 18-004019
Issue Date : 30/07/2018
Print Date : 30/07/2018

Sample Description Clients Ref : "FR - Mesh"
 Warp knit mesh with reinforcing straps
 Colour : Black

AS 1530.2-1993

Methods for Fire Tests on Building Materials, Components and Structures.
Part 2: Test for Flammability of Materials

Date Tested	27/07/2018	
Flammability Index	1	
	Length	Width
Spread Factor	0	0
Heat Factor	1	1
Maximum height (d)		
Mean	2.1	1.6
Coefficient of Variation	124.1	33.9 %
Heat (a)		
Mean	3.3	1.5 °C.min
Coefficient of Variation	139.9	0.0 %
Number of Specimens Tested	9	9
Observation	Visible smoke, melting, dripping and flaming debris.	

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test, and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

137335 29259

Page 1 of 1

Australian Wool Testing Authority Ltd
 Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
 - Chemical Testing
 - Mechanical Testing
 - Performance & Approvals Testing

- Accreditation No. 965
 - Accreditation No. 965
 - Accreditation No. 1356



Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the samples or samples tested. This document shall not be reproduced, copied in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

0204/1106

APPROVED SIGNATORY

MANAGING DIRECTOR

THE MARRON CONSULTANCY

4/168 Becroft Road, Cheltenham, NSW 2119
 Phone/Fax +61 2 9868 5351
 Mobile: 0408 335 558
 Email: crawd@bigpond.net.au
 ABN 96 276 451 253

10 August 2018

Mr Tarryn Grobbelaar
 Marketing Manager & HSEQ Coordinator
 Uni-span Australia Pty Ltd
 28 Computer Road
 Yatala, QLD 4207

Dear Tarryn,

RE: Fire Retardant Uni-mesh

I refer to the Test Report by AWTA Product Testing Test Number; 18-004019, Issue date 30/07/2018 related to FR-Mesh. This records the test on black colour Uni-Mesh treated with fire retardant when tested to AS 1530.2—1993.

The Report states a Flammability Index of 1 and a Spread Factor of 0. An observation noted that there was visible smoke, melting, dripping and flaming debris.

The ABCB Temporary Structures Standard 2015, Table 4.1.2 FIRE HAZARD PROPERTIES in (a) Within 4 m of the base of the temporary structure and for air-supported structures (without other supporting framework) — Flammability Index of 6, Spread-of-Flame Index of 9 and Smoke-Developed Index of 8.

The AWTA Test Report indicates that FR-Mesh complies with the ABCB Flammability Index.

The AWTA Test Report does not report on the Spread-of-Flame Index or the Smoke-Developed Index which are determined by AS/NZS 1530.3.

Yours sincerely,

D. W. Crawford BE (UNSW), ASTC, MIEAust NER, RPEQ

CONTACT

LOCATION	TEL	EMAIL
HEAD OFFICE 28 Computer Road Yatala, QLD 4207	07-3442 4000	info@uni-span.com.au
BEENLEIGH 22A Spans Road Beenleigh, QLD 4207	07-3442 4000	clint@uni-span.com.au
NSW 11 Huntingwood Drive Huntingwood, NSW 2148	1300 882 825	ben@uni-span.com.au